



4 or 5★  
ENERGY  
RATING

2-6  
PEOPLE

MAINS  
PRESSURE

5, 7 or 10  
YEAR  
WARRANTY<sup>17, 18, 19</sup>

## WHY RHEEM GAS STORAGE?

**5 Star energy rating** models save you money and are good for the environment.

**Designed for Australia's tough conditions**, using 70 years of experience in Australia.

**5, 7 or 10 year warranty** models available.<sup>17, 18, 19.</sup>

**Capacities to suit most family sizes** and hot water requirement, starting from 90 Litres.

**Fast hot water recovery** of up to 200 Litres per hour available.<sup>16</sup>

**High recovery Rheem Stellar models** for high-demand installations.

**Mains pressure water** delivery for steady, hot and strong hot water.

**Indoor models** also available (3 star energy rating).

**The ability to service multiple uses** at once without losing hot water pressure.

**Full technical support** through Rheem's National Service Network.

**Available to suit Natural Gas or Propane.**

## THE RIGHT RHEEM FOR YOU



Model Number:  
850 Series

### RHEEM STELLAR®

- 5 Star energy efficiency
- High recovery 200L/hour of hot water<sup>16</sup>
- Mains pressure at multiple taps
- 330L or 360L first hour capacity of hot water<sup>16</sup>
- 10 year warranty<sup>19</sup>
- Modern design that complements any home



Model Number:  
350/354 Series

### RHEEM 5 STAR

- 5 Star energy efficiency
- Mains pressure at multiple taps
- Strong recovery
- 272L or 302L first hour capacity of hot water<sup>16</sup>
- 5 year warranty<sup>17</sup>

### RHEEMPLUS®

- Available in RheemPlus® 50°C temperature models
- No tempering valve required
- Adjustable to deliver higher temperatures (complying with AS 3498)



Model Number:  
347 Series

### RHEEM 4 STAR

- 90L, 135L and 170L capacities
- 4 Star energy efficiency
- Mains pressure
- Hi-temp thermostat, so you need less hot water<sup>†</sup>
- 7 year warranty<sup>18</sup>

<sup>†</sup>Based on the most common temperature 43°C shower through a 9 litre/minute showerhead mixing with cold water at 10°C Rheem 4 star 347 Series with thermostat set at 73°C delivers 15-20% more continual shower time than the Rheem 3 Star 311 Series with thermostat set at 65°C.



Model Number:  
311 Series

### RHEEM 3 STAR#


- 90L, 135L and 170L capacities
- Mains pressure
- 5 year warranty<sup>17</sup>
- Indoor models available (not shown)
- 3 Star energy efficiency

#Not available in NSW

# RHEEM GAS STORAGE HOT WATER PRODUCT DATA

	Rheem 3 Star <sup>#</sup>			Rheem 4 Star			Rheem 5 Star		Rheem Stellar <sup>®</sup>		Rheem Indoor <sup>*</sup>	
	90	135	170	90	135	170	265	295	330	360	135	170
Model Number	311090NO/PO	311135NO/PO	311170NO/PO	347090NO/PO	347135NO/PO	347170NO/PO	350265NO/PO	350295NO/PO	850330NO/PO	850360NO/PO	300135NO/PO	300170NO/PO
RheemPlus <sup>®</sup>	—	—	—	—	—	—	354265NO/PO	354295NO/PO	—	—	—	—
<b>Number of People:</b>												
Moderate Climate	1-3	2-4	3-5	1-3	2-4	3-5	2-4	3-5	2-5	3-6	2-4	3-5
Cool Climate	1-2	2-3	3-4	1-2	2-3	3-4	2-3	3-4	2-4	3-5	2-3	3-4
Warranty (years) <sup>17,18,19</sup>	5	5	5	7	7	7	5	5	10	10	5	5
Gas Type	Natural Gas/Propane			Natural Gas/Propane			Natural Gas/Propane		Natural Gas/Propane		Natural Gas/Propane	
GAS Energy Rating ★	3.4	3.2	3.2	4.1	4.3	4.0	5.3	5.3	5.2	5.0	3.4	3.2
Storage Capacity (Litres)	85	130	160	90	135	170	130	160	130	160	135	170
Recovery Rate (L/Hour@45°C) Natural Gas	125	150	170	100	117	117	142	142	200	200	120	126
First Hour Capacity (Litres)	210	280	330	190	252	287	272	302	330	360	255	296
Hourly Gas Consumption (MJ/Hr)Nat/Prop	30/30	35/35	40/40	25/25	27/26	27/26	30/30	30/30	42/42	42/42	30/30	30/30
<b>Dimensions mm</b>												
A	1198	1598	1898	1158	1558	1858	1622	1922	1600	1900	1615	1915
B	422	422	422	422	422	422	485	485	485	485	425	425
C	502	502	502	502	502	502	556	556	558	558	500	500
D	588	988	1213	588	988	1213	988	1213	988	1213	988	1213
E	328	328	403	328	328	403	328	409	328	409	328	403
F	298	298	298	298	298	298	298	298	298	298	297	297
G	1078	1478	1778	1078	1478	1778	600	600	770	770	1490	1790
H (RheemPlus <sup>®</sup> Only)							545	545				
J (RheemPlus <sup>®</sup> Only)							182	182				
K	473	473	473	473	473	473	520	520	520	520	490	490
L	208	208	208	208	208	208	240	240	252	252	213	213
M							297	297	299	299		
N							97	97	93	93		
Weight Empty (kg)	52	68	79	48	59	69	75	85	70	80	54	63
Relief Valve Setting (kPa)		1400			1400			1400		1400		1400
Expansion Control Valve Setting (kPa)		1200			1200			1200		1200		1200
<b>Max Water Supply Pressure:</b>												
with ECV (kPa)		960			960			960		960		960
without ECV (kPa)		1120			1120			1120		1120		1120
Water Connections		RP ¾/20			RP ¾/20			RP ¾/20		RP ¾/20		RP ¾/20
Water Connections (RheemPlus)								G¾B				
Gas Connection		RP ½/15			RP ½/15			RP ½/15		RP ½/15		

\*Flue Diameter 75mm

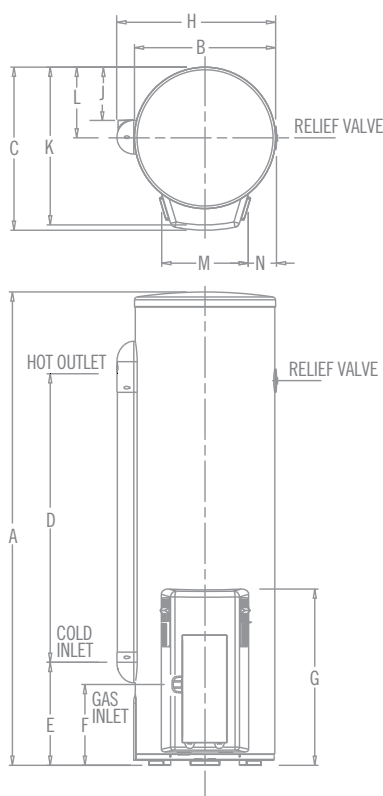

## GLOSSARY OF TERMS

**Recovery rate** – the volume of water a heater can reheat in one hour. Measured as the volume of completely cold water (should the water heater be run completely out) that can be heated to 45°C over the cold water temperature.

**First Hour Capacity** – a measure of water heater capacity that combines both the stored hot water volume & the hourly recovery rate (eg: if a water heater has storage capacity of 130L and a recovery rate of 200L/hour, its First Hour Capacity is 330L).

## Warranty, terms and conditions

16. Based on 45°C temperature rise.

17. 5 year cylinder warranty, 3 year labour on cylinder, 1 year parts and labour warranty on all other components for domestic (non-commercial) installations. Conditions apply, see the Rheem warranty set out in the product's Owner's Guide or view it at [www.rheem.com.au/warranty](http://www.rheem.com.au/warranty)

18. 7 year cylinder warranty, 3 year labour on cylinder, 1 year parts and labour on all other components for domestic (non-commercial) installations. Conditions apply, see the Rheem warranty set out in the product's Owner's Guide or view it at [www.rheem.com.au/warranty](http://www.rheem.com.au/warranty)

19. 10 year cylinder and SuperFlue warranty, 5 year labour on cylinder and SuperFlue, 1 year parts and labour warranty on all other components for domestic (non-commercial) installations. Conditions apply, see the Rheem warranty set out in the product's Owner's Guide or view it at [www.rheem.com.au/warranty](http://www.rheem.com.au/warranty)  
Some applications require a tempering valve in accordance with AS/NZS 3500.4.

<sup>#</sup> Not available in NSW