



AquaMAX G390SS

Largest delivery in our range, you choose the mix.

The AquaMAX G390SS patented in-built mixing valve gives you 390 Litres first hour delivery with a five star energy rating and ten year cylinder warranty².


The mixing valve adds a controlled mix of cold water, giving up to 205 Litres of 60°C¹ hot water delivery in the initial draw, with 185 Litres of recovery per hour after that.

As an installation option, your plumber can also install twin temperature delivery so you can enjoy the convenience of 65°C hot water in the kitchen and laundry when you need it, while taking comfort in the knowledge that it is safer for kids with bathroom hot water taps at 50°C or lower.



- Natural Gas
- 155 Litre Stainless Steel tank
- Inbuilt mixing valve
- 390 Litre first hour capacity
- 5 Star Energy Rating
- 10 year cylinder warranty²
- External installation

Specifications	390 SS (with mix)
Cat. No.	G390SS
Gas type	Natural
Tank Capacity	155 Litres
Nominal gas consumption	40 MJ/Hr
AGA Star Rating Index	5 Stars
Recovery rate at 45°C rise	185 Litres/Hr ¹
Installation type	External only
Pressure & Temperature Relief Valve setting	1400 kPa/99°C
Max. water supply pressure	1100 kPa
Tank material	stainless steel
Water inlet connection	Rp ¾" (20mm) Female
Water outlet connection	Rp ¾" (20mm) Female
Gas connection	½" flared compression
Warranty (Cylinder)	10 years
WaterMark Licence No.	WMKA00200
Overall height	1625mm
Width (approx.)	520mm
Depth (approx.)	610mm
AGA Approval No.	6114
Weight empty (approx.)	65 kg
Number of people	3-6

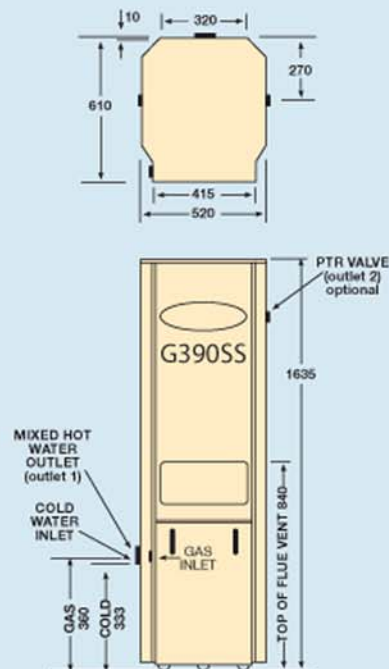

1. Based on an inlet water temperature of 15°C. 2. Full Warranty conditions available on request from AquaMAX Australia Pty Ltd. Call Toll Free 1800 676 000.